


Balance 30 LTE

Dual Ethernet WAN, Embedded LTE Failover

Specifications

Balance 30 LTE	
WAN Interface	1x USB Interface 1x Embedded Cellular Modem 2x 10/100/1000M Ethernet Ports *
LAN Interface	4x 10/100/1000M Ethernet Ports
Router Throughput	200Mbps
Antenna Connectors	2x SMA Cellular Antenna Connectors
Power Input	Device: 12V DC AC Adapter: AC Input 100V – 240V, DC Output 12V
Power Consumption	30W (max.)
Dimension (L x W x H)	10.2 x 5.24 x 1.38 inches 260 x 133 x 35 mm
Weight	2.2 pounds / 1 kg
Operating Temperature	-40° – 149°F / -40° – 65°C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS
Warranty	1-Year Limited Warranty
Package Content	Balance 30 LTE, 12V3A Power Supply (ACW-602) 2x LTE Antennas (ACW-815) 1 Pair of Mounting Brackets (ACW-721)

* WAN ports can act as a LAN port if needed

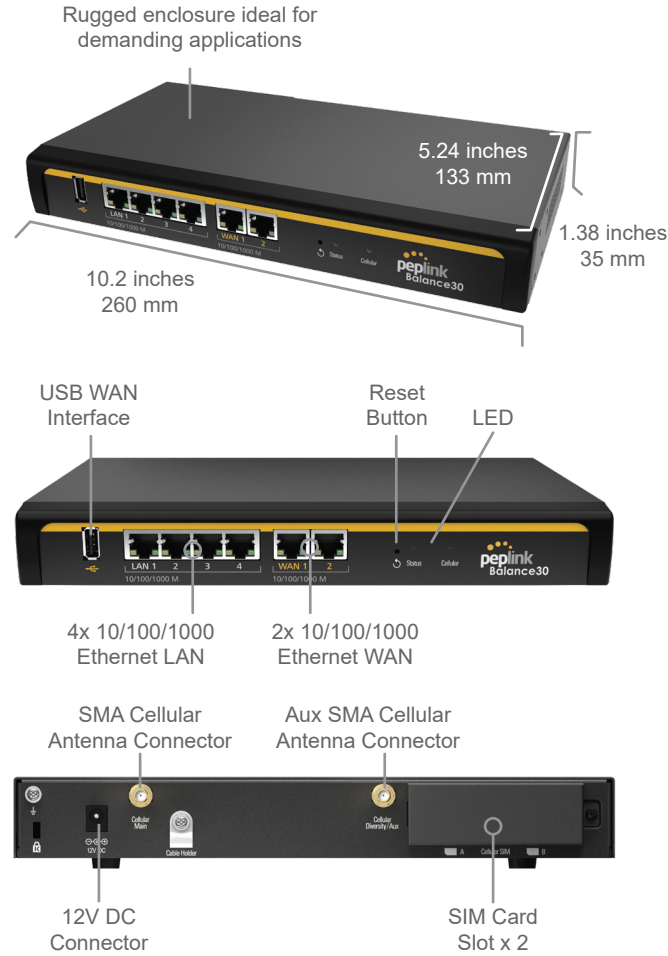

Ordering Information

	Product Code	Carrier/Region	Cellular Standard	4G Bands/Frequencies (MHz)	3G Bands/Frequencies (MHz)
LTE	BPL-031-LTE-US-T	US	LTE	B1, B2, B3, B4, B5, B7, B8, B12, B13, B20, B25, B26, B29, B30, B41	WCDMA/HSPA+/DC-HSPA+: B1, B2, B3, B4, B5, B8
	BPL-031-LTE-E-T	Europe/International	LTE	B1, B3, B7, B8, B20	WCDMA/HSPA+/DC-HSPA+: B1, B2, B5, B6, B8

Features

<p>WAN Support for PPPoE, Static IP, DHCP Support for Dynamic DNS services WAN Link Health Check Intelligent Failover Bandwidth Allowance Monitor</p> <p>LAN DHCP Server for LAN Clients Extended DHCP Options DHCP Reservation DNS Proxy for LAN Clients</p>	<p>Complete VPN Solution PepVPN Site-to-Site VPN 256-bit AES Encryption Pre-shared Key Authentication Dynamic Routing PPTP VPN Server IPsec VPN (Network-to-Network)</p> <p>Security Stateful Firewall DoS Prevention</p>	<p>Load Balancing Intelligent Failover Per-Service Load Distribution Multiple Algorithms</p> <p>Networking NAT and IP Forwarding Static Routes Port Forwarding Many to One, One to One NAT NAT Pool SIP ALG, H.323 ALG UPnP, NAT-PMP WINS Server</p>	<p>Advanced QoS User Groups Bandwidth Reservation Individual Bandwidth Limit Application Prioritization By User Groups SIP, HTTPS, VPN QoS Custom Application QoS</p>	<p>Device Management Web Administrative Interface Command Line Interface InControl Cloud Management Email Notification Active Client & Session Lists Bandwidth Usage Statistics Syslog Service SNMP v1, v2c and v3</p> <p>Certification FCC, CE, RoHS</p>
---	---	--	--	---